

18-INCH 30# FELT INTERLAYMENT
AT EACH COURSE

WOOD SHAKES ROOF COVERING


SELF-ADHERING ICE DAM PROTECTION
AS PRESCRIBED BY LOCAL BUILDING
CODE. IF NO ICE DAM PROTECTION IS
USED, TAPE TOP EDGE OF DRIP EDGE
TO ZIP SYSTEM ROOF PANEL SURFACE
USING ZIP SYSTEM TAPE.

ZIP SYSTEM ROOF

STARTER COURSE AT EAVE

CODE APPROVED DRIP
EDGE FLASHING

ROOF TRUSS OR RAFTER

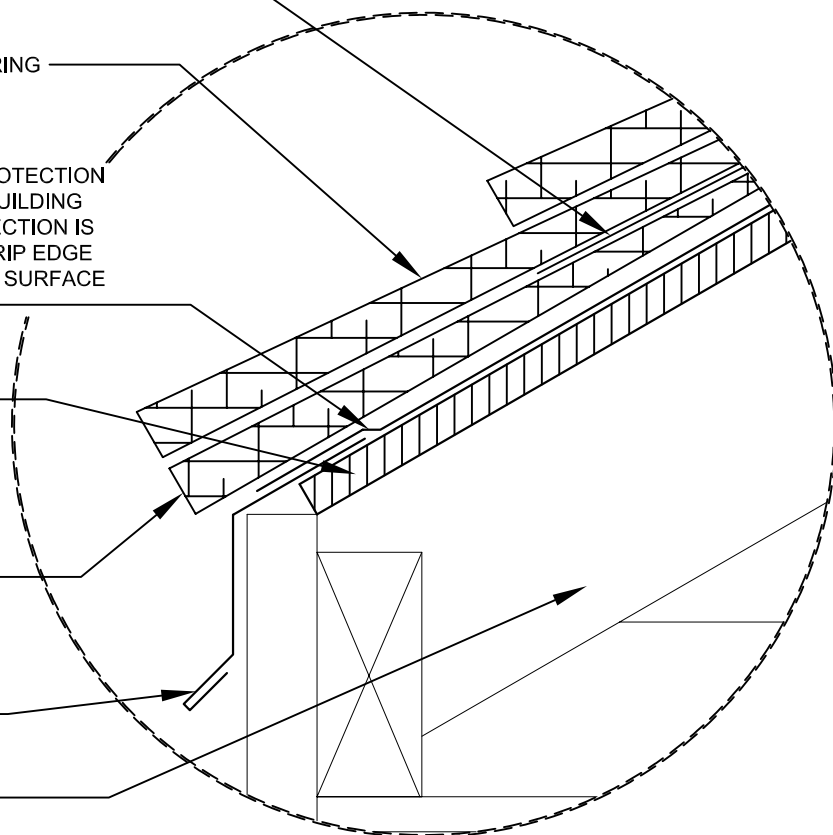

FOLLOW THE RECOMMENDATIONS OF THE WOOD SHAKE MANUFACTURER AND GOVERNING BUILDING CODE FOR INSTALLATION AND SEALING/PRIMING REQUIREMENTS. REFER TO THE CEDAR SHAKE AND SHINGLE BUREAU NEW ROOF CONSTRUCTION MANUAL FOR WOOD SHAKE INSTALLATION FOR COLD ROOF, HIGH HUMIDITY, OR ANY OTHER SPECIAL APPLICATIONS.

DRAWING NOT TO SCALE

12-14-2007

Sales Office: 10925 David Taylor Drive - Suite 300 - Charlotte, NC 28262
Telephone: 800.933.9220 - Facsimile: 704.547.9228 - www.huberwood.com

another innovation from



These construction details are provided to assist in the installation of ZIP System® product(s) and may not apply to every situation. Manufacturer accepts no responsibility or liability for the use of these or other construction details.